

WENTEQ MICROWAVE LOW NOISE AMPLIFIER
MICROWAVE CORP ALN0390-15-4007


Features:

- High gain, low noise figure
- Low VSWR, unconditional stable
- Small size, low cost
- SMA female connector I/O
- Operating temperature -40~+75°C, storage temperature -50~+125°C

Electrical Specifications

Frequency Range	3600 to 4200 MHz
Noise Figure	0.7 dB Typical, 0.85dB Max@+25degree C
P-1dB Compression Point	+10 dBm typical
Output IP3 Point	+20dBm typical
Nominal Gain	40 dB typical @25°C base plate temperature
Gain flatness	+/-1.0 dB over whole band
Gain Variation	+/-1.5 dB over temperature
Maximum input no damage power	13 dBm CW
Input VSWR	2.0:1
Output VSWR	2.0:1
Spurious	-60 dBc max
Operating Temperature	-40 to +85°C
Survival Temperature	-50 to +125°C
DC Power Supply	90mA@+9~+15V
In/Out connectors	SMA-type female
Size	1.70"x0.95"x0.375"

Mechanical Structure:

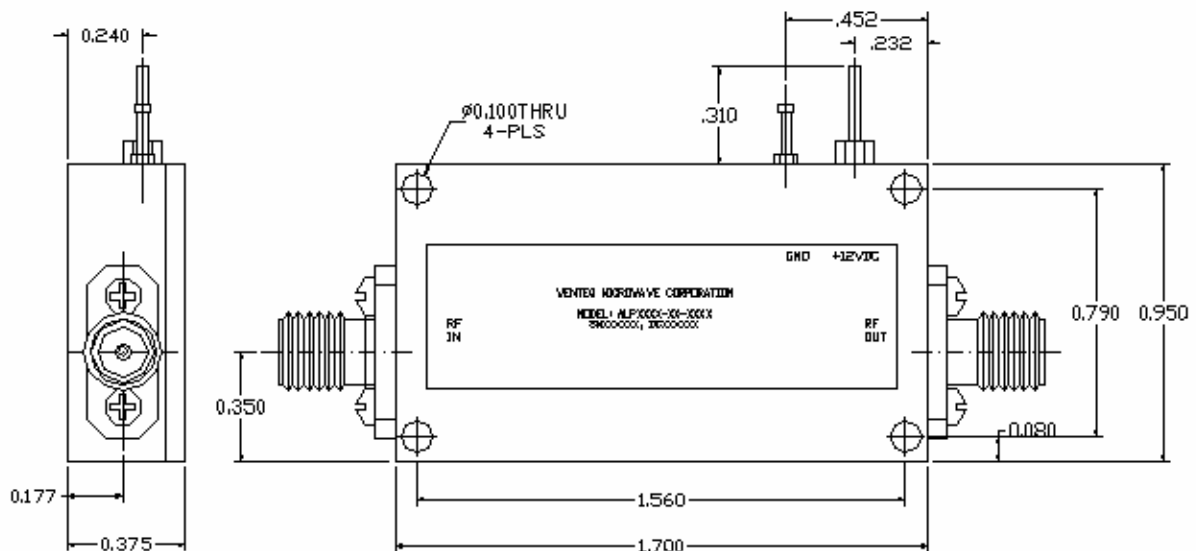

Note: All units in inches.