


Key Features:

- Center operating frequency range: 2000~3000MHz, 100-300MHz bandwidth
- Drop-in configuration
- Small size, low cost
- Power handling +25 Watts
- Customer specify center frequency, bandwidth and port definition

Electrical Specifications

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Reverse Power, Watts	Temp. Range, °C
F1080-0240-08	2300-2500	0.5 Max	≥ 20	≤ 1.2	≥ 25	≥ 10	-30 ~ +65
F1080-0280-07	2700~2900	0.5 Max	≥ 20	≤ 1.2	≥ 25	≥ 10	-30 ~ +65

Mechanical Structure:

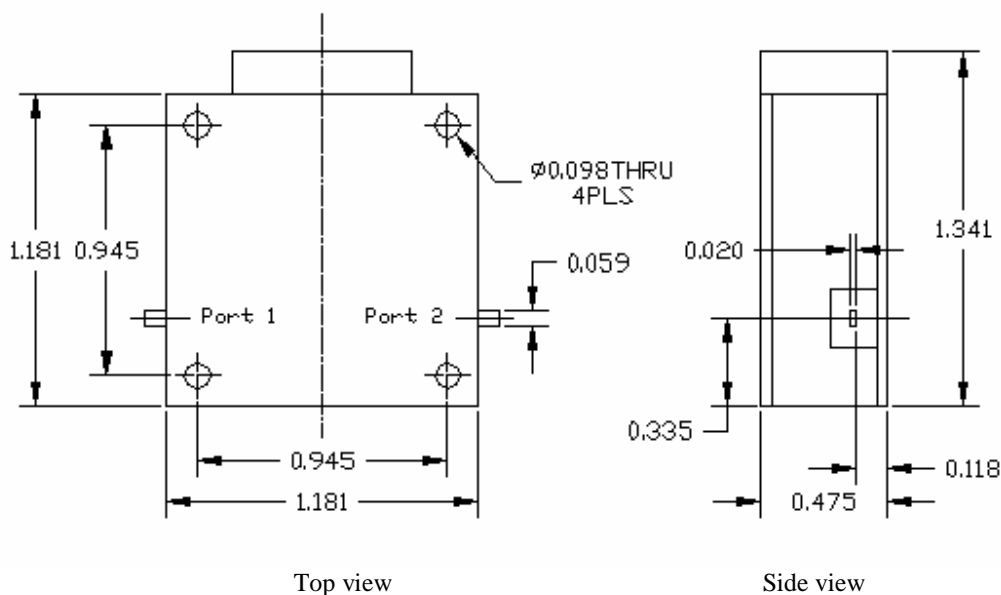

Note: All units are in inches (mm).

Ordering Information:

