

Key Features:


- Frequency range: 7.0~18MHz, bandwidth from 200MHz to 1000MHz
- Drop-in configuration
- Small size, low cost
- Power handling +5 Watts
- Operating temperature -30~+60°C
- Customer specify center frequency and bandwidth



Electrical Specifications

Part No.	Freq Range GHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Reverse Power, Watts	Temp. Range, °C
F1220-0940-02	9.3-9.5	0.5 Max	≥ 20	≤ 1.2	≥ 5	≥ 5	-30 ~ +60
F1220-1425-04	14.0-14.5	0.5 Max	≥ 20	≤ 1.2	≥ 5	≥ 5	-30 ~ +60

Mechanical Structure:

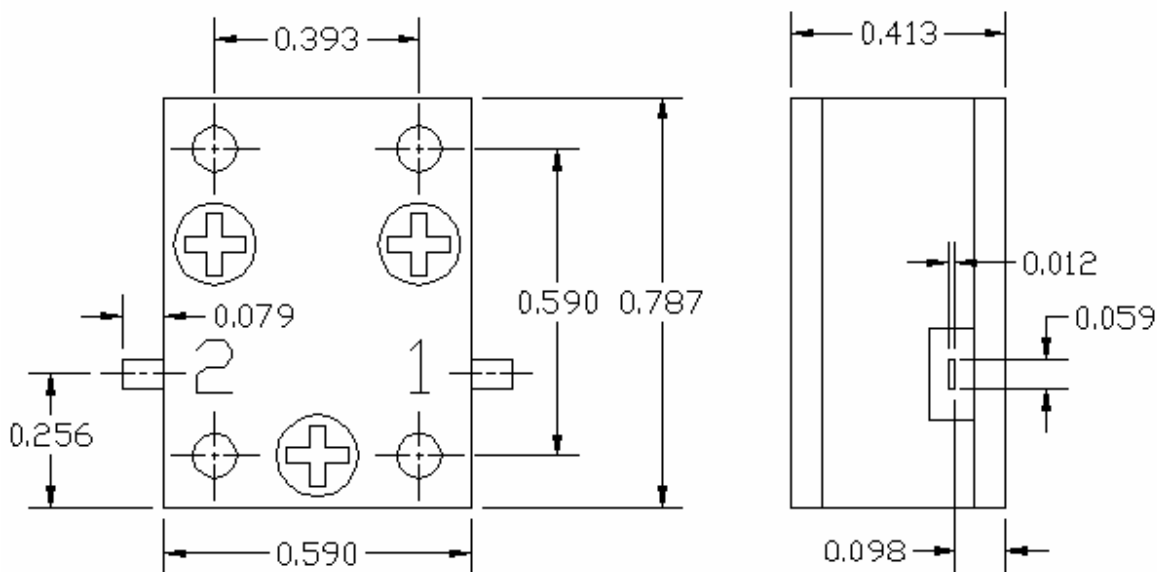

Note: All units in inches.

Ordering Information:

