

**Key Features:**


- Frequency range: 470~862MHz, up to full bandwidth
- Drop-in configuration
- Small size, low cost
- Power handling +10 Watts CW,
- Operating temperature -40~+70°C
- Customer specify center frequency and bandwidth



**Electrical Specifications**

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Reverse Power Watts	Temp. Range, °C
F1332-0540-26	470-610	0.7 Max	≥ 20	≤ 1.25	≥ 10	≥ 1	-40 ~ +70
F1332-0736-34	610~862	0.7 Max	≥ 20	≤ 1.25	≥ 10	≥ 1	-40 ~ +70
F1332-0666-59	470-862	1.2 Max	≥ 15	≤ 1.50	≥ 10	≥ 1	-40 ~ +70

**Mechanical Structure:**

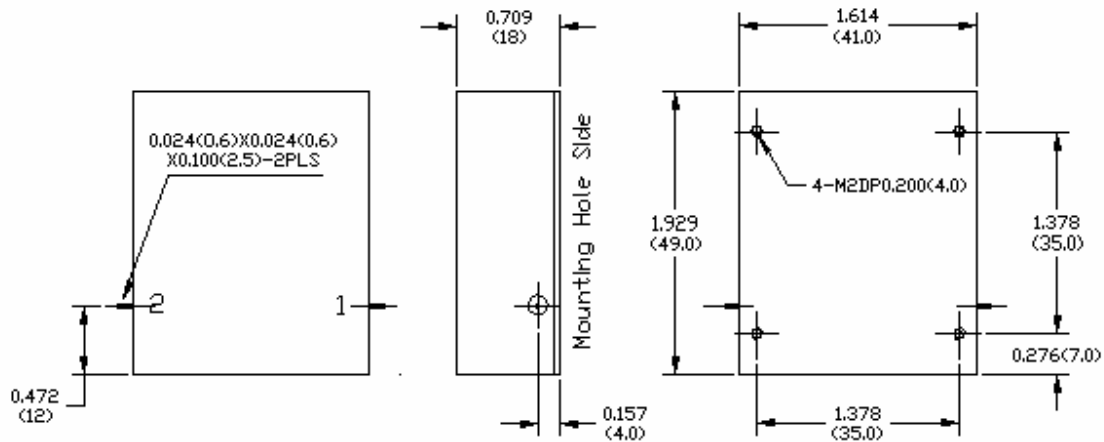

Note: All units in inches (mm).

**Ordering Information:**

