


Key Features:

- Frequency range: 350~800MHz, up to 10% bandwidth
- Drop-in configuration
- Small size, low cost
- Power handling +175 Watts
- Operating temperature -30~+80°C
- Customer specify center frequency and bandwidth

Electrical Specifications

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F1526-0400-10	380-420	0.4 Max	≥ 20	≤ 1.2	≥ 175	-30 ~ +80
F1526-0445-11	420~470	0.4 Max	≥ 20	≤ 1.2	≥ 175	-30 ~ +80
F1526-0491-09	470~512	0.4 Max	≥ 20	≤ 1.2	≥ 175	-30 ~ +80

Mechanical Structure:

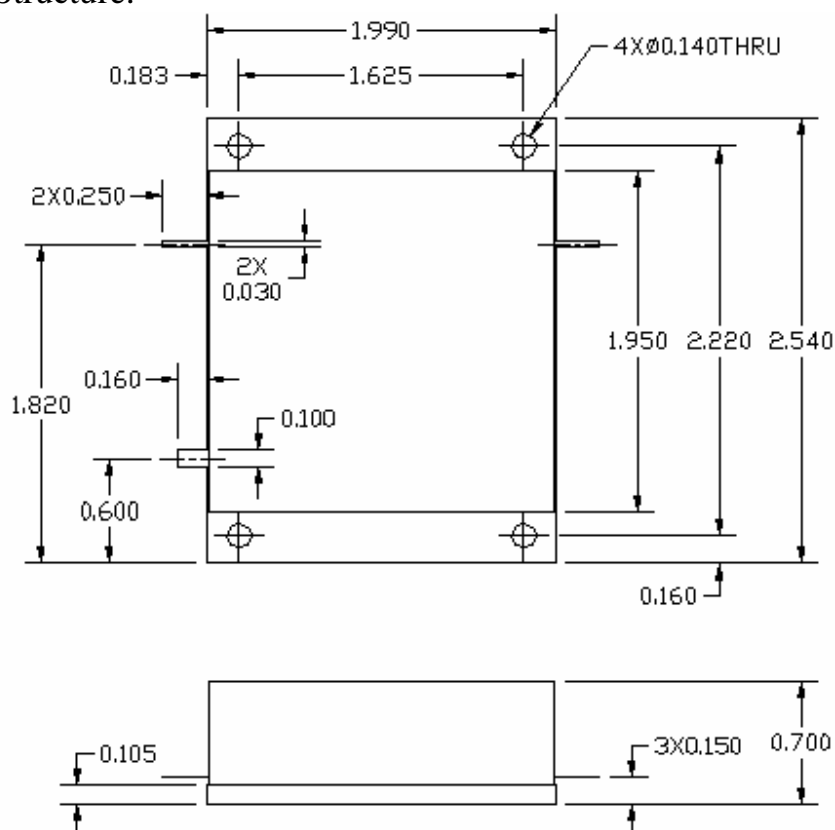

Note: All units in inches.