


Key Features:

- Center frequency range: 500~1000MHz, bandwidth up to 10%.
- Drop-in configuration
- Small size, low cost
- Power handling +200 Watts
- Operating temperature -30~+60°C
- Customer specify center frequency and bandwidth

Electrical Specifications

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F1536-0520-10	500~525	0.4 Max	≥ 20	≤ 1.2	≥ 200	-30 ~ +60
F1536-0750-03	740-760	0.4 Max	≥ 20	≤ 1.2	≥ 200	-30 ~ +60
F1536-0915-03	900-930	0.4 Max	≥ 20	≤ 1.2	≥ 200	-30 ~ +60

Mechanical Structure:

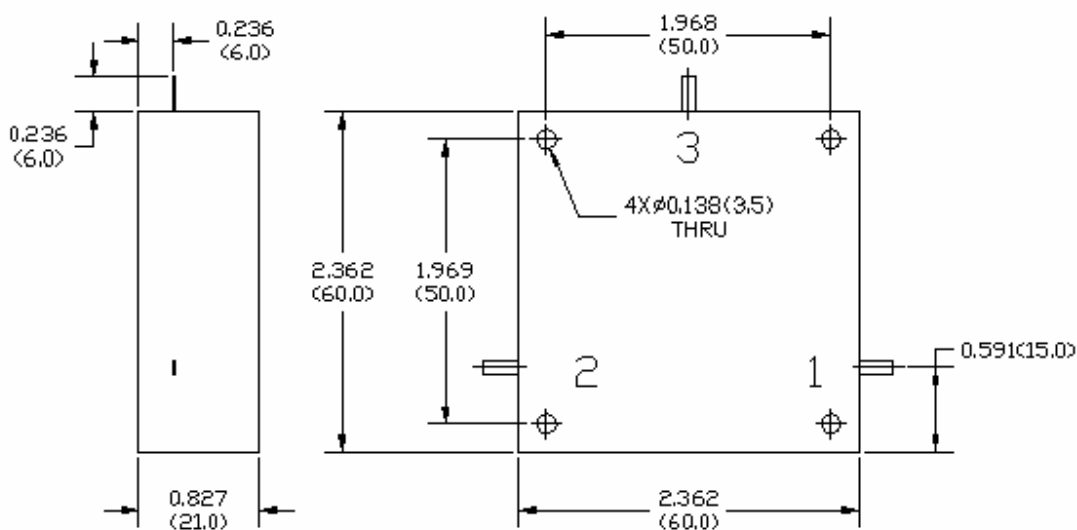

Ordering Information:

Note: All units in inches (mm).

F1536-XXXX-XX
 ↓
 Bandwidth, XX%,
 ↓
 Frequency XXXX MHz,