

Key Features:


- Frequency range: 2.5~3.5MHz, 200MHz bandwidth
- Drop-in configuration
- Small size, low cost
- Power handling +5 Watts
- Operating temperature -30~+60°C
- Customer specify center frequency and bandwidth



Electrical Specifications

Part No.	Freq Range GHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F1602-0290-07	2.8-2.9	0.5 Max	≥ 20	≤ 1.2	≥ 5	-30 ~ +60
F1602-0300-07	2.9-3.1	0.5 Max	≥ 20	≤ 1.2	≥ 5	-30 ~ +60
F1602-0330-06	3.2-3.4	0.5 Max	≥ 20	≤ 1.2	≥ 5	-30 ~ +60

Mechanical Structure:

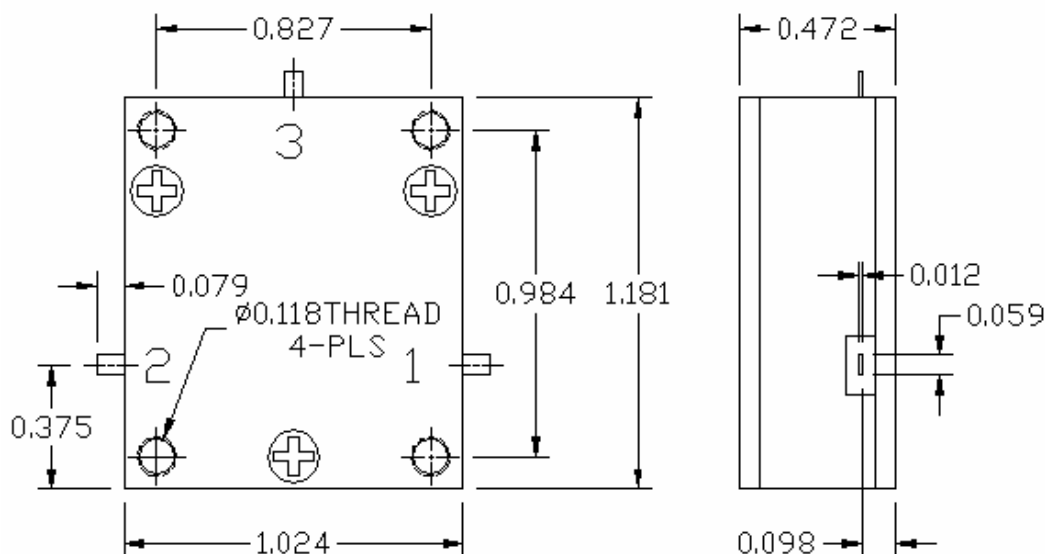

Note: All units in inches.

Ordering Information:

