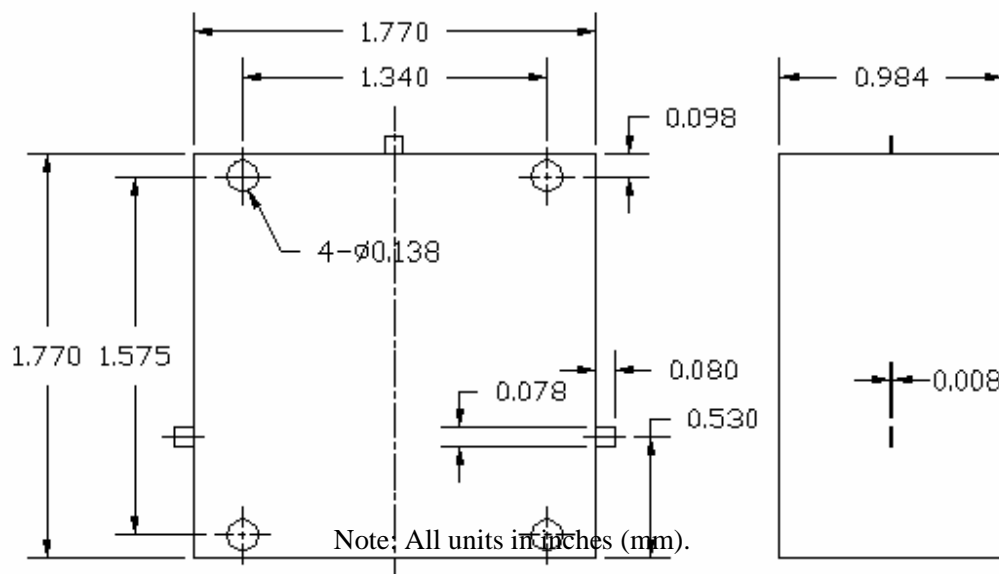


**Key Features:**

- Frequency range: 180~300MHz, up to 15% bandwidth
- Drop-in configuration
- Power handling +20 Watts
- Operating temperature -25~+70°C
- Customer specify center frequency and bandwidth

**Electrical Specifications**

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F1820-0195-15	180-210	0.7 Max	≥ 18	≤ 1.25	≥ 20	-25 ~ +70
F1820-0260-08	250-270	0.7 Max	≥ 18	≤ 1.25	≥ 20	-25 ~ +70

**Mechanical Structure:****Ordering Information:**