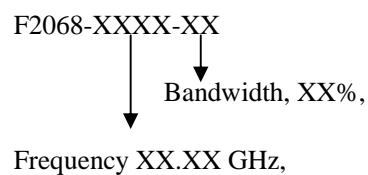


Key Features:


- Frequency range: 800~2000MHz
- SMA connectorized configuration
- Small size, low cost
- Power handling >+50Watts forward
- Weight 5 oz (141 grams)
- Customer specify center frequency and bandwidth

**Electrical Specifications**

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Iso., dB	VSWR	FWD Power, Watt	Reverse Power, Watts	Temp. Range, °C
F2068-0088-18	800-960	0.5 Max	≥ 20	≤1.2	≥ 50	≥ 10	-30 ~ +65
F2068-0089-15	820-960	0.5 Max	≥ 20	≤1.2	≥ 50	≥ 10	-40 ~ +70
F2068-0109-25	950~1225	0.5 Max	≥ 19	≤1.25	≥ 50	≥ 10	-55 ~ +85
F2068-0109-24	960~1220	0.5 Max	≥ 20	≤1.2	≥ 50	≥ 10	-55 ~ +85
F2068-0123-25	1080~1380	0.6 Max	≥ 20	≤1.2	≥ 50	≥ 10	-40 ~ +70
F2068-0130-15	1200~1400	0.5 Max	≥ 20	≤1.2	≥ 50	≥ 10	-40 ~ +70
F2068-0136-20	1220~1500	0.5 Max	≥ 20	≤1.2	≥ 50	≥ 10	-40 ~ +70
F2068-0140-29	1200~1600	0.5 Max	≥ 18	≤1.3	≥ 50	≥ 10	-40 ~ +70
F2068-0126-06	1220~1300	0.5 Max	≥ 20	≤1.2	≥ 50	≥ 10	-40 ~ +70
F2068-0154-05	1500~1580	0.5 Max	≥ 20	≤1.2	≥ 50	≥ 10	-40 ~ +70
F2068-0160-31	1350~1850	0.5 Max	≥ 19	≤1.25	≥ 50	≥ 10	-40 ~ +70
F2068-0180-11	1700~1900	0.5 Max	≥ 20	≤1.2	≥ 50	≥ 10	-40 ~ +70
F2068-0200-10	1900~2100	0.5 Max	≥ 20	≤1.2	≥ 50	≥ 10	-40 ~ +70

Ordering Information:

Mechanical Structure:

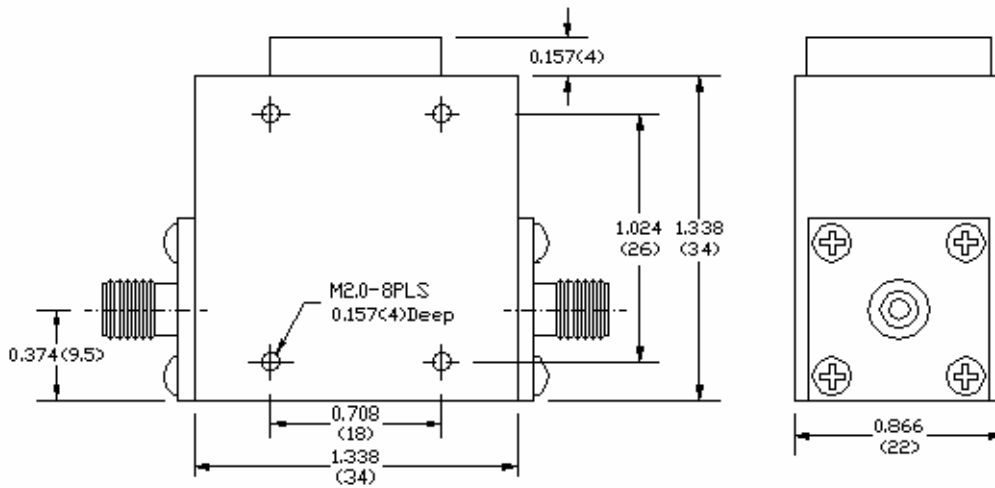

Note: All units are in inches.