

Key Features:


- Wide frequency range, 1350~2700MHz full band operation
- 50 Ohm SMA connector In/out
- Small size, low cost
- Power handling +50 Watts CW, reverse termination 10 Watt
- Operating temperature -40~+75°C

Electrical Specifications

Part No.	Freq Range GHz	Insertion Loss, dB*	Reverse Isolation, dB*	VSWR	Forward Power, Watts	Reverse Power, Watts	Temp. Range, °C
F2085-0203-67	1.35-2.70	0.6/0.7	17.0/15.0	1.35/1.5	50	10	-40 ~ +75

Note: Specifications given are for room temperature and for over temperature range

Mechanical Structure:

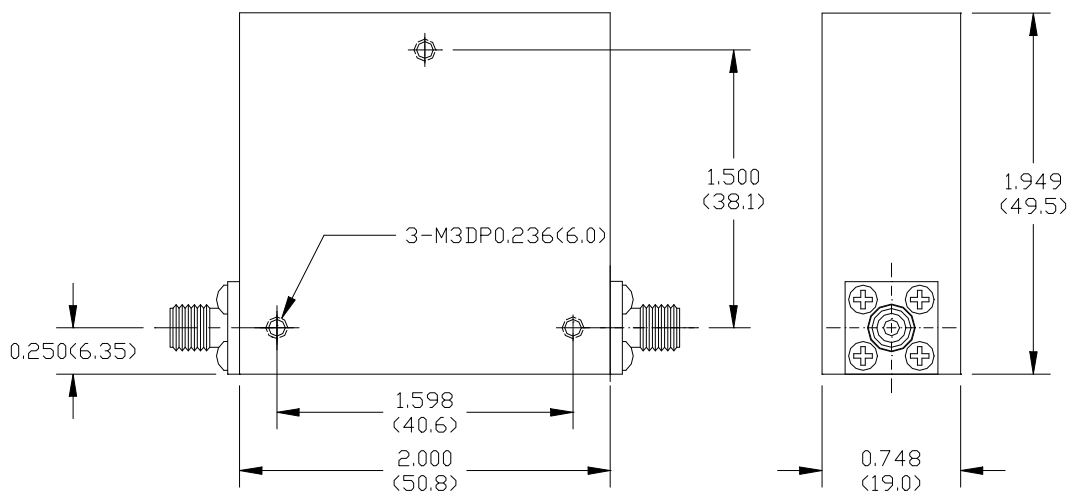

Note: All units in inches (mm).

Ordering Information:

