

**Key Features:**


- Frequency range: 1.7~2.7GHz
- Small size, SMA connectorized in/out
- Power handling +20 Watts forward, +10 Watts reverse
- Operating temperature -40~+75°C
- Weight 4oz (112 grams)
- Customer specify center frequency and bandwidth



**Electrical Specifications**

Part No.	Freq Range GHz	Ins. Loss, dB Typ./Max	Reverse Iso., dB	VSWR Max	Forward Power, Watts	Reverse Power Watts	Temp. Range, °C
F2088-0194-24	1.71-2.17	0.5	20 min	1.2:1	≥ 20	≥ 10	-40 ~ +70
F2088-0200-10	1.90-2.10	0.5	20 min	1.2:1	≥ 20	≥ 10	-40 ~ +70
F2088-0210-19	1.90~2.30	0.5	20 min	1.2:1	≥ 20	≥ 10	-40 ~ +70
F2088-0218-05	2.13~2.23	0.3	25 min	1.2:1	≥ 20	≥ 10	-40 ~ +70
F2088-0225-04	2.20~2.30	0.3	25 min	1.2:1	≥ 20	≥ 10	-40 ~ +70
F2088-0230-08	2.20~2.40	0.5	20 min	1.2:1	≥ 20	≥ 10	-40 ~ +70
F2088-0235-13	2.20~2.50	0.5	20 min	1.2:1	≥ 20	≥ 10	-40 ~ +70
F2088-0245-04	2.40-2.50	0.5	20 min	1.2:1	≥ 20	≥ 10	-40 ~ +70

**Mechanical Structure:**

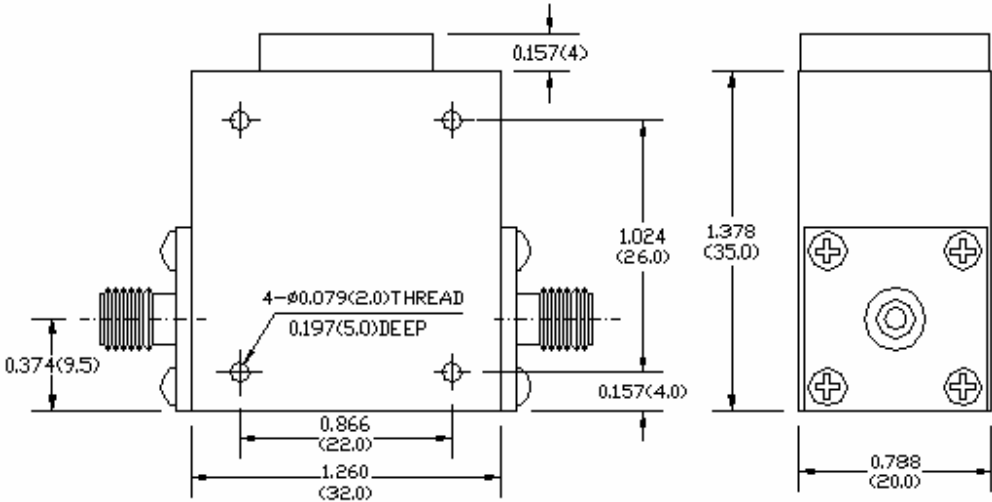

Note: All units in inches (mm)

**Ordering Information:**

