


Key Features:

- Wide frequency range, 1500~3000MHz full band operation
- 50 Ohm SMA connector In/out
- Small size, low cost
- Power handling +10 Watts CW, reverse termination 2 Watt
- Operating temperature -20~+70°C

Electrical Specifications

Part No.	Freq Range GHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Reverse Power, Watts	Temp. Range, °C
F2100-0225-67	1.5-3.0	0.5	17.0	1.4	10	2	-20 ~ +70

Mechanical Structure:

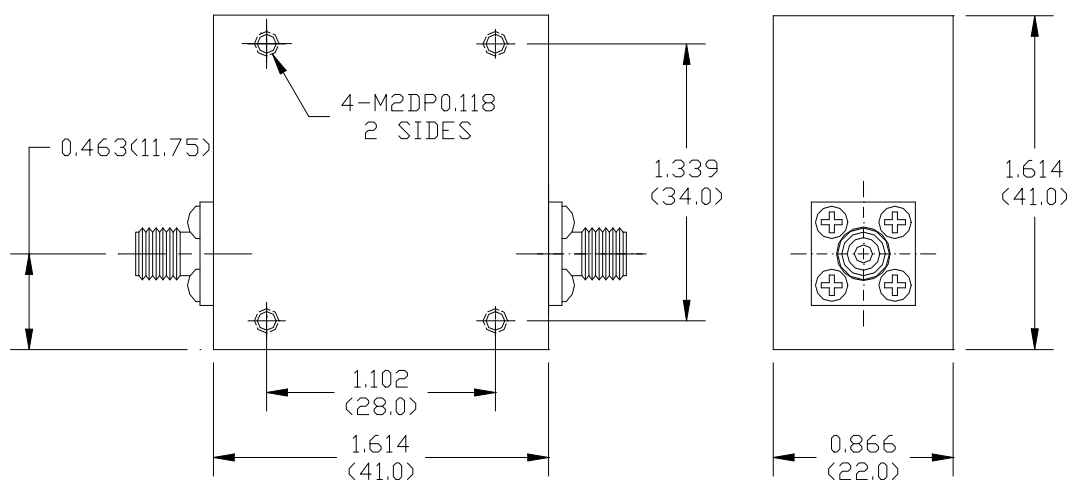

Ordering Information:

Note: All units in inches (mm).

F2100-XXXX-XX
 ↓ ↓
 Bandwidth, XX%,
 Frequency XX.XX GHz,