

Key Features:


- Wide frequency range: 2000-4000MHz partial or full band
- 50 ohm SMA coaxial connectors
- Small size, low cost
- Power handling +10 Watts forward, +3 Watts reverse
- Operating temperature -40~+70°C



Electrical Specifications

Part No.	Freq Range GHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Reverse Power, Watts	Temp. Range, °C
F2112-0300-67	2.00-4.00	0.6 Max	≥ 18	≤ 1.40	≥ 10	>3	-30 ~ +70
F2112-0328-41	2.60-3.95	0.5 Max	≥ 21	≤ 1.30	≥ 10	>3	-40 ~ +70

Mechanical Structure:

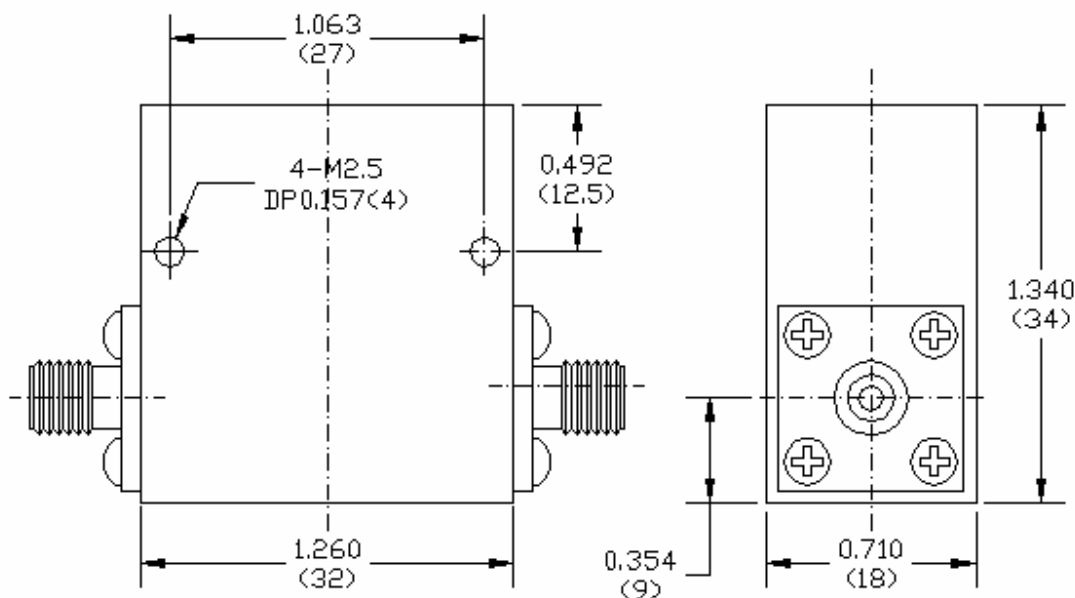

Note: All units in inches (mm).

Ordering Information:

