


Key Features:

- Frequency range: 4.0~5.5GHz, bandwidth up to 500MHz
- SMA connectors
- Small size, low cost
- Power handling +5 Watts Forward and Reverse
- Customer specify center frequency and bandwidth

Electrical Specifications

Part No.	Freq Range GHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Reverse Power Watts	Temp. Range, °C
F2132-0420-10	4.00-4.40	0.5 Max	≥ 20	≤ 1.2	≥ 5	>5	-20 ~ +70
F2132-0530-08	5.10-5.50	0.5 Max	≥ 20	≤ 1.2	≥ 5	>5	-20 ~ +70

Mechanical Structure:

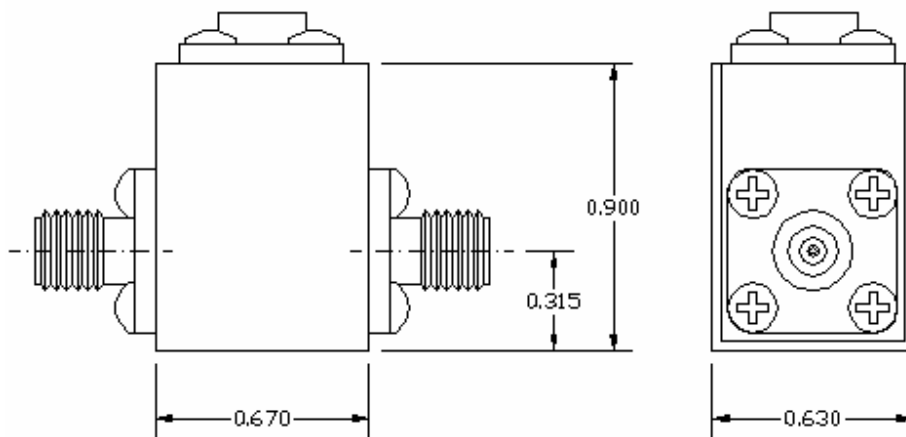

Note: All units are in inches.

Ordering Information:

F2132-XXXX-XX
 ↓ ↓
 Frequency XX.XX GHz, Bandwidth, XX%,