


Key Features:

- Wide frequency range up to 3.0-6.0GHz full band
- SMA connectorized configuration
- Small size, low cost
- Power handling +10 Watts forward
- Operating temperature -30~+70°C

Electrical Specifications

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Reverse Power Watts	Temp. Range, °C
F2140-0450-67	3.0-6.0	0.6 Max	≥ 17	≤ 1.40	≥ 10	10 Watts	-30 ~ +70

Mechanical Structure:

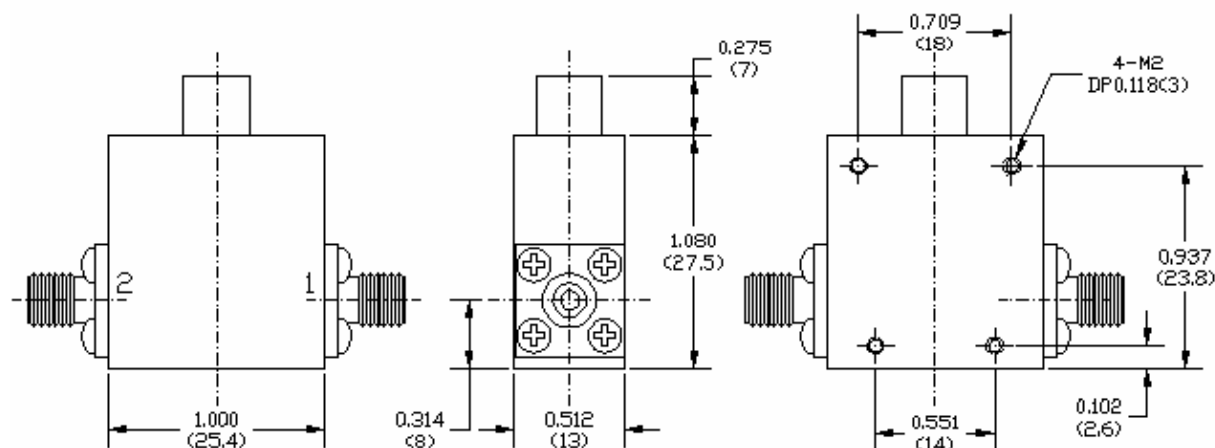

Note: All units in inches (mm)

Ordering Information:

