


Key Features:

- Frequency range: 4.5~7.0GHz
- SMA connectors
- Small size, low cost
- Power handling +15 Watts
- Customer specify center frequency and bandwidth

Electrical Specifications

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Reverse Power Watts	Temp. Range, °C
F2148-0580-04	5.70-5.90	0.5 Max	≥ 20	≤ 1.2	≥ 15	>7.5	-25 ~ +65
F2148-0615-08	5.90-6.40	0.5 Max	≥ 20	≤ 1.2	≥ 15	>7.5	-25 ~ +55
F2148-0665-05	6.50-6.80	0.5 Max	≥ 20	≤ 1.2	≥ 15	>7.5	-25 ~ +55

Mechanical Structure:

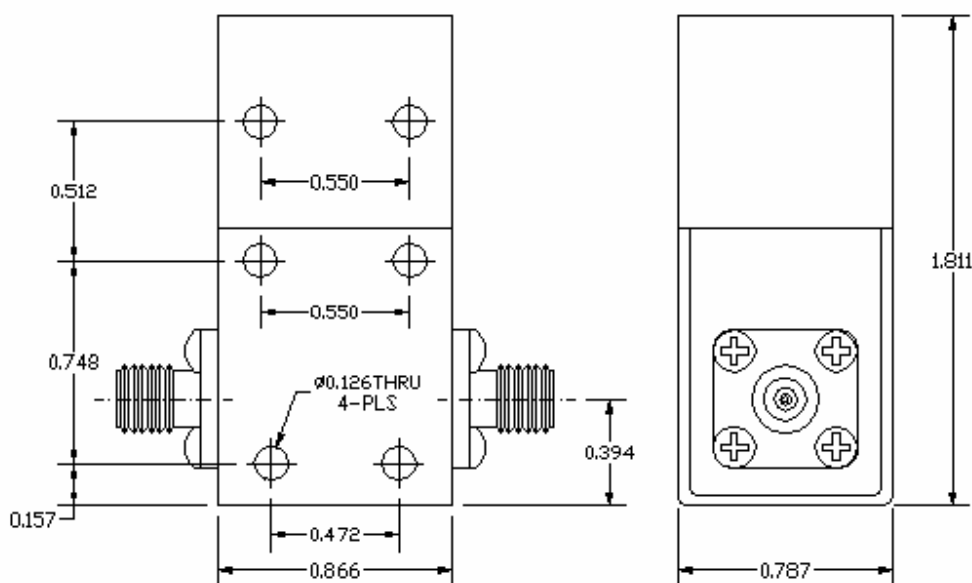

Note: All units are in inches.

Ordering Information:

