

Key Features:


- Operating frequency range 6.0-12.0GHz full bandwidth
- SMA female connector,
- Small size, low cost
- Power handling +10 Watts forward, reverse termination +1 Watt,
- Operating temperature -25~+70°C



Electrical Specifications

Part No.	Freq Range GHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts CW	Reverse Power Watts CW/Peak	Temp. Range, °C
F2166-0900-67	6.0-12.0	0.6 Max	≥ 18	≤ 1.40	≥ 10	≥ 1	-25 ~ +70

Mechanical Structure:

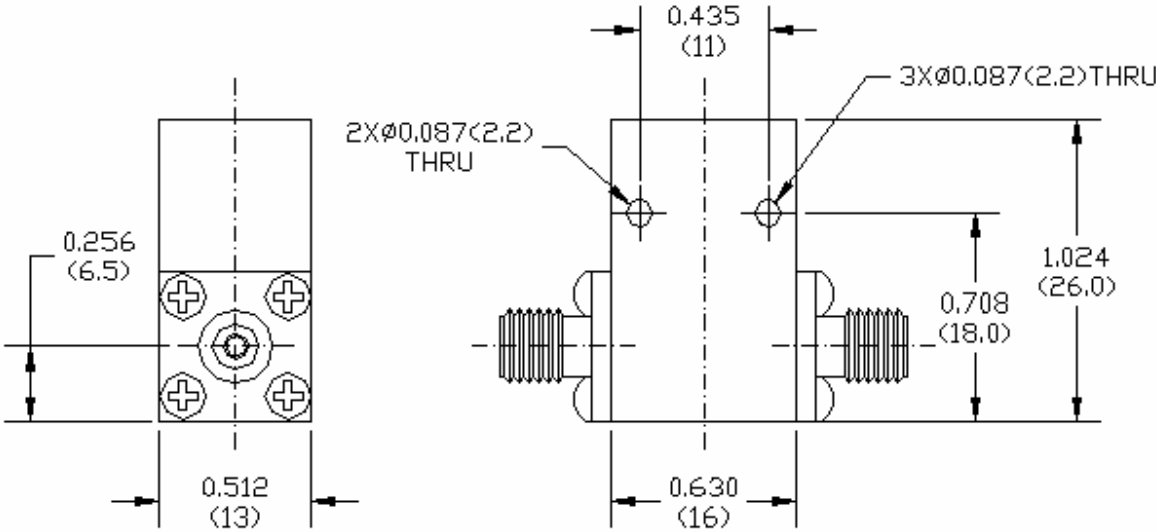

Note: All units in inches(mm)

Ordering Information:

