


Key Features:

- Frequency range: 12.0~16.0GHz
- SMA connectorized configuration
- Small size, low cost
- Power handling >10Watts forward, >1Watt termination
- Operating temperature -20~+60°C
- Customer can specify center frequency , bandwidth and connector type

Electrical Specifications

Part No.	Freq Range GHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Reverse Power, Watts	Temp. Range, °C
F2195-1410-06	13.7-14.5	0.5 Max	≥ 18	≤ 1.30	≥ 10	≥ 1	-20 ~ +60

Mechanical Structure:

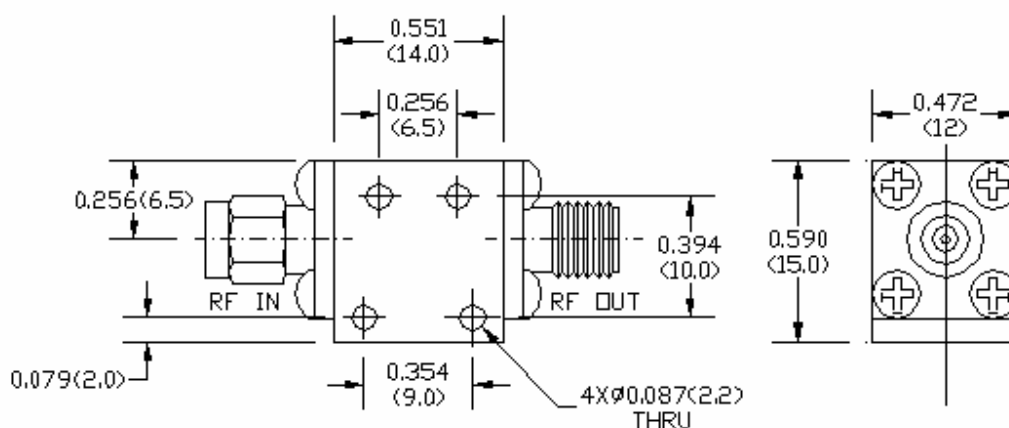

Note: All units in inches (mm).

Ordering Information:

F2195-XXXX-YY-ZZ, ZZ represent Male or Female SMA connectors at in/out port
 ↓
 Bandwidth, XX%,
 ↓
 Frequency XX.XX GHz,