


Key Features:

- Center frequency operation in 10.0-13.0GHz
- SMA connectorized configuration
- Small size, low cost
- Power handling +10 Watts forward, +2Watt Reverse
- Operating temperature -40~+70°C

Electrical Specifications

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Reverse Power Watts	Temp. Range, °C
F2225-1140-05	11.1~11.7	0.5 Max	≥ 20	≤ 1.20	10	2	-40 ~ +70
F2225-1150-17	10.5-12.5	0.5 Max	≥ 20	≤ 1.25	10	2	-40 ~ +70
F2225-1185-16	10.9-12.8	0.5 Max	≥ 20	≤ 1.25	10	2	-40 ~ +70

Mechanical Structure:

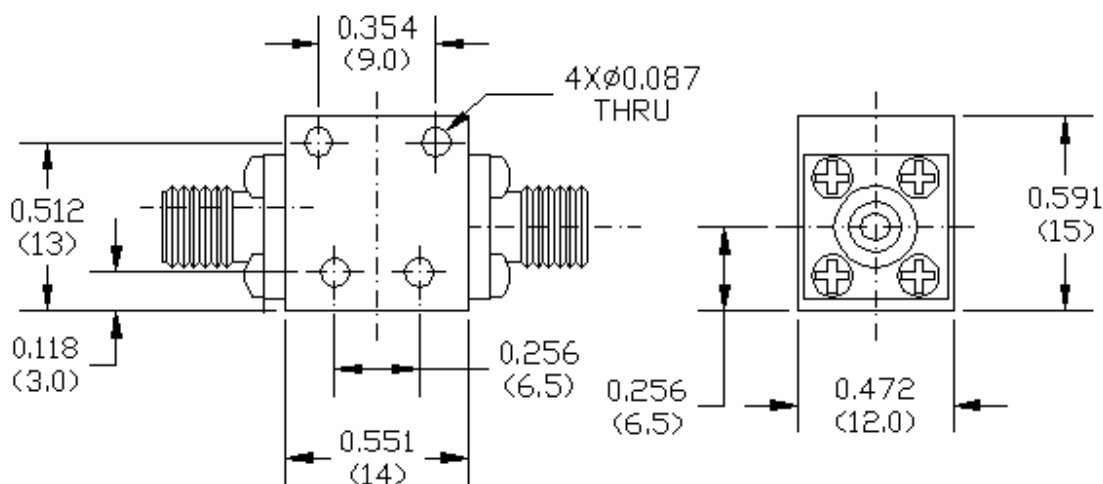

Note: All units in inches (mm)

Ordering Information:

