


**Key Features:**

- Frequency range: 8.0~18.0GHz full band
- Small size, low cost
- Power handling >10Watts forward, >1Watt termination
- Operating temperature -40~+70°C
- Customer specify center frequency and bandwidth for narrower band requirements

**Electrical Specifications**

Part No.	Freq Range GHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Reverse Termination, Watts	Temp. Range, °C
F2240-1300-77	8.0-18.0	0.8 Max	16.0 Min	≤ 1.4:1	≥ 10	≥ 1	-40 ~ +70

**Mechanical Structure:**

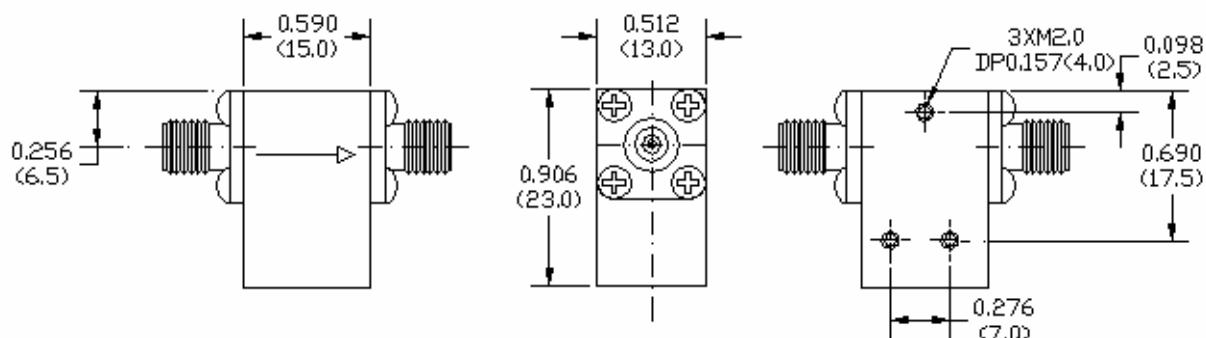

Note: All units in inches (mm).

**Ordering Information:**

