

Key Features:


- Frequency range: 470~862MHz, up to full bandwidth
- Small size, low cost
- 50 ohm SMA female I/O
- Power handling +10 Watts CW,
- Operating temperature -40~+70°C
- Customer specify center frequency and bandwidth for narrower bandwidth



Electrical Specifications

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Reverse Power Watts	Temp. Range, °C
F2332-0540-26	470-610	0.7 Max	≥ 20	≤ 1.25	≥ 10	≥ 1	-40 ~ +70
F2332-0736-34	610~862	0.7 Max	≥ 20	≤ 1.25	≥ 10	≥ 1	-40 ~ +70
F2332-0666-59	470-862	1.2 Max	≥ 15	≤ 1.50	≥ 10	≥ 1	-40 ~ +70

Mechanical Structure:

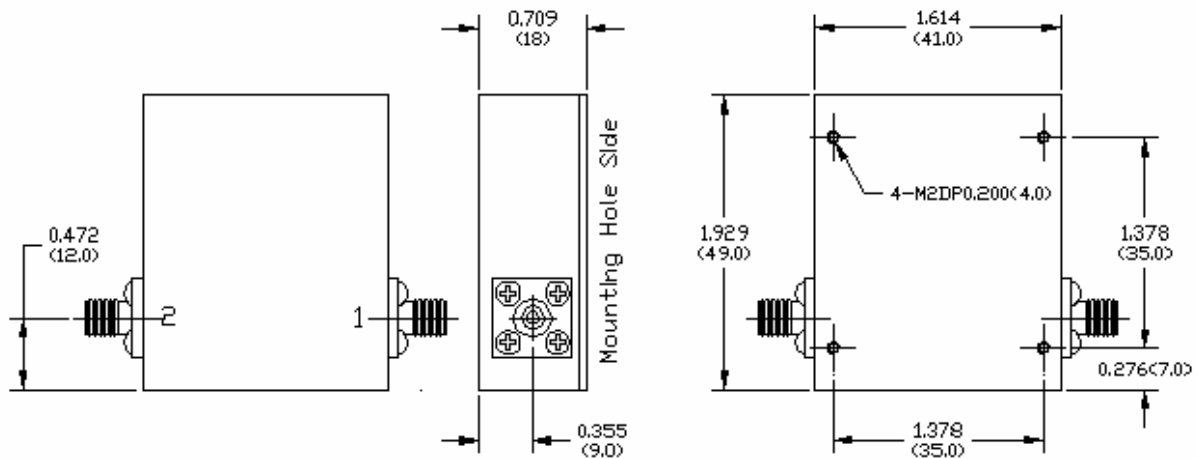

Note: All units in inches (mm).

Ordering Information:

