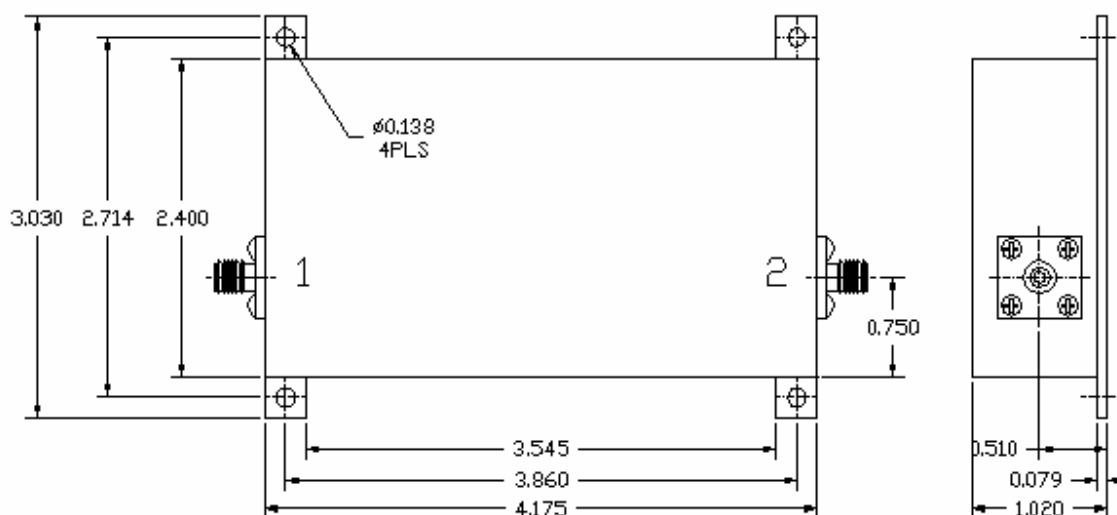


Key Features:

- Broadband operation, frequency range: 225~400MHz full band
- Dual junction provide high reverse isolation
- SMA or N-type connectors,
- Small size, low cost
- Power handling +80 Watts

Electrical Specifications

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F2420-0312-56	225~400	2.0 Max	≥ 35	≤ 1.40	≥ 80	-20 ~ +55

Mechanical Structure:

Note: All units are in inches.

Ordering Information:

F2420-XXXX-XX
↓ ↓
 Bandwidth, XX%,
↓
Frequency X.XXX GHz,