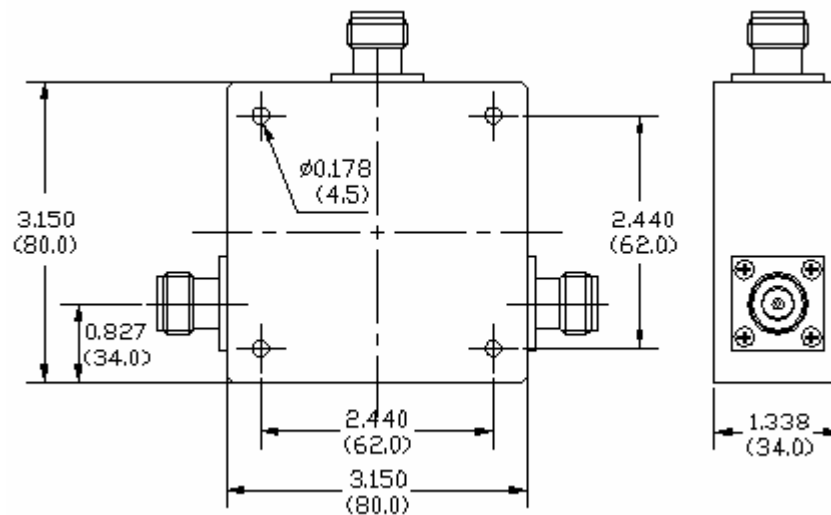


Key Features:

- Center frequency range: 150~400MHz, up to 8% bandwidth
- N-Type (default) or TNC Connectors
- Good magnetic filed shileding
- High power handling capability
- Customer can specify center frequency and bandwidth
- Weight ~1.2kg (2.6 lbs)

Electrical Specifications

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F2518-0182-08	175~190	0.6Max	20.0	1.25	150	-10 ~ +60
F2518-0250-08	240~260	0.5Max	18.0	1.30	300	-10 ~ +50
F2518-0250-16	230~270	0.8Max	18.0	1.30	150	-10 ~ +50
F2518-0280-07	270~290	0.6Max	18.0	1.25	150	-55 ~ +85
F2518-0295-10	280~310	0.6Max	18.0	1.25	150	-55 ~ +85
F2518-0305-08	292~318	0.6Max	18.0	1.25	150	-55 ~ +85
F2518-0380-08	365~395	0.6Max	18.0	1.25	150	-66 ~ +85

Mechanical Structure:**Ordering Information:**

F2518-XXXX-XX
 ↓ ↓
 Bandwidth, XX%,
 ↓
 Frequency 0XXX MHz,