

Key Features:


- Frequency range: 0.96~1.22MHz
- N-type connector
- Small size, low cost
- Power handling >+50Watts CW, 5kWatts pulse
- Operating temperature -55~+85°C
- Customer specify other center frequency and bandwidth
-



Electrical Specifications

Part No.	Freq Range GHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Power CW, Watts	Power Pulse, kWatts	Temp. Range, °C
F2558-0109-24	0.96-1.22	0.5 Max	≥ 20	≤1.2	≥ 50	≥5	-55 ~ +85

Mechanical Structure:

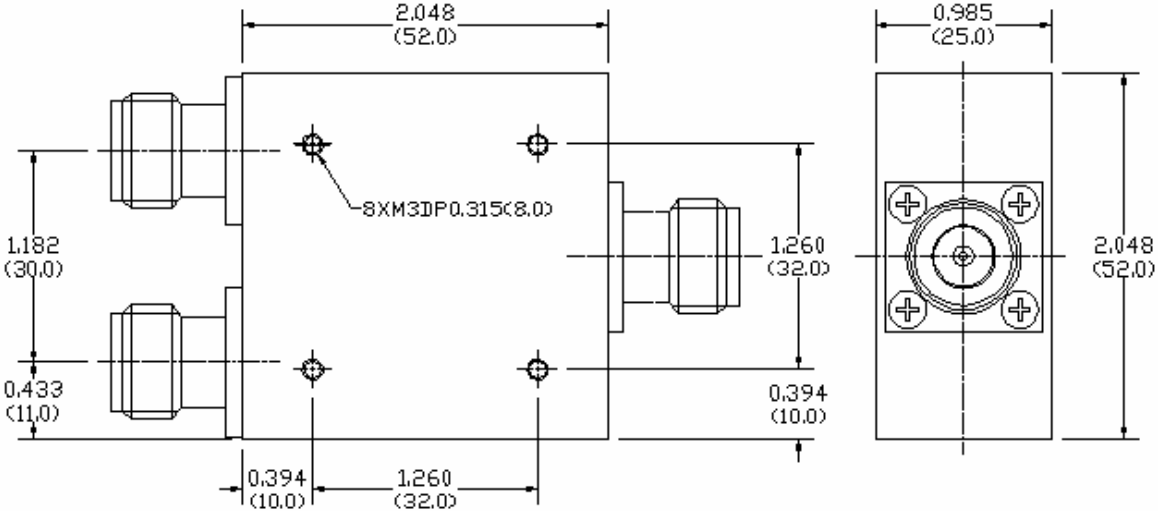

Note: All units in inches(mm).

Ordering Information:

