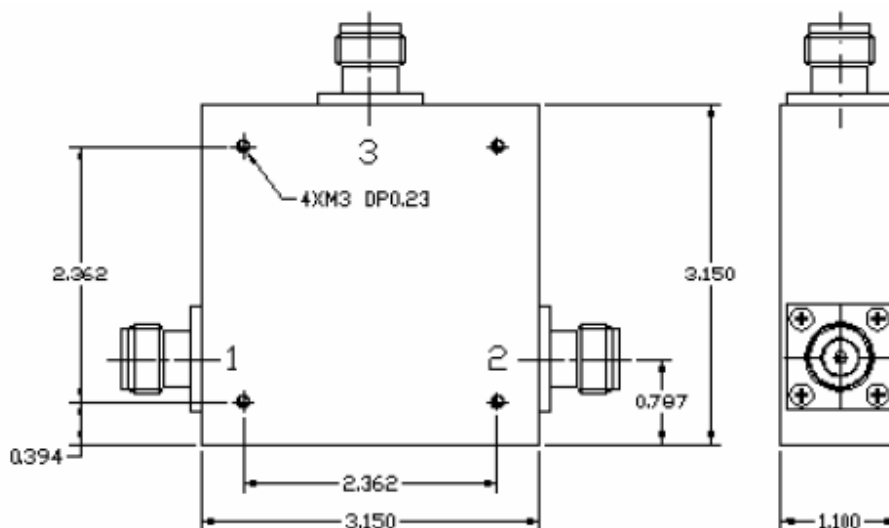


Key Features:

- Wide frequency range: 1000~2000MHz partial or full band
- 50 ohm N-type or SMA female connector In/out
- Small size, low cost
- Power handling +50 Watts forward
- Weight, 11b7oz (655 grams) for SMA type, 11b10oz (725 grams) for N-type
- Operating temperature 0~+45°C

**Electrical Specifications**

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F2572-0150-67	1.0~2.0	1.0 Max	≥ 15	≤ 1.5	≥ 50	0 ~ +45

Mechanical Structure:

Note: All units in inches.

Ordering Information:

F2572-XXXX-XX
 ↓ ↓
 Bandwidth, XX%,
 Frequency XX.XX GHz,