

Key Features:

- Wide frequency range, 1350~2700MHz full band operation
- 50 Ohm SMA connector In/out
- Small size, low cost
- Power handling +50 Watts CW
- Operating temperature -40~+80°C




Electrical Specifications

Part No.	Freq Range GHz	Insertion Loss, dB*	Reverse Isolation, dB*	VSWR*	Forward Watts CW/Pulse	Temp. Range, °C
F2585-0203-67	1.35-2.70	0.60/0.70	17.0/15.0	1.35/1.50	50/200	-40 ~ +85

Note: Specifications given are for room temperature and for over temperature range

Mechanical Structure:

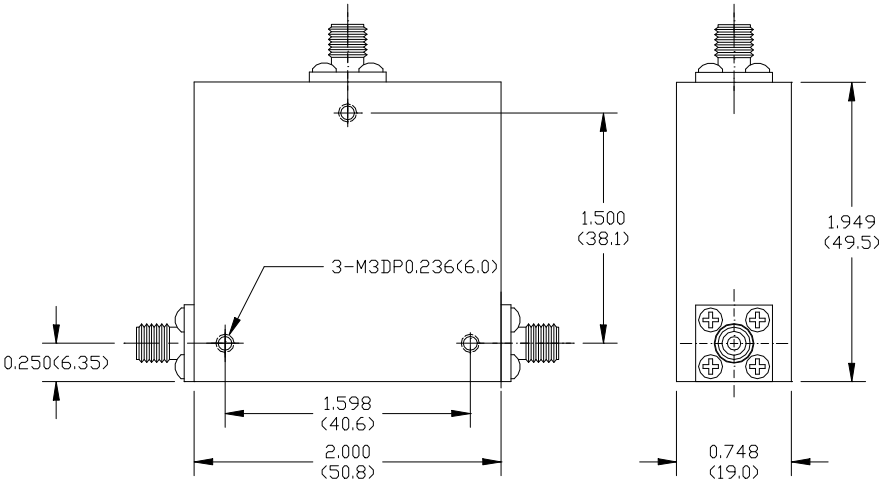

Note: All units in inches (mm).

Ordering Information:

