


Key Features:

- Frequency range: 2000~3000MHz
- SMA connectorized configuration
- Small size, low cost
- Power handling >+50Watts forward
- Operating temperature -40~+70°C
- Customer specify center frequency and bandwidth

Electrical Specifications

Part No.	Freq Range MHz	Insertion Loss, dB Typ/Max	Reverse Isolation , dB	VSWR	Forward Power, Watts	Temp. Range, °C
F2590-0240-08	2300~2500	0.2/0.5	≥ 20	≤1.2	≥ 50	-40 ~ +70
F2590-0250-04	2400~2500	0.3/0.5	≥ 20	≤1.2	≥ 50	-40 ~ +70
F2590-0257-12	2420~2720	0.3/0.5	≥ 20	≤1.2	≥ 50	-40 ~ +70

Mechanical Structure:

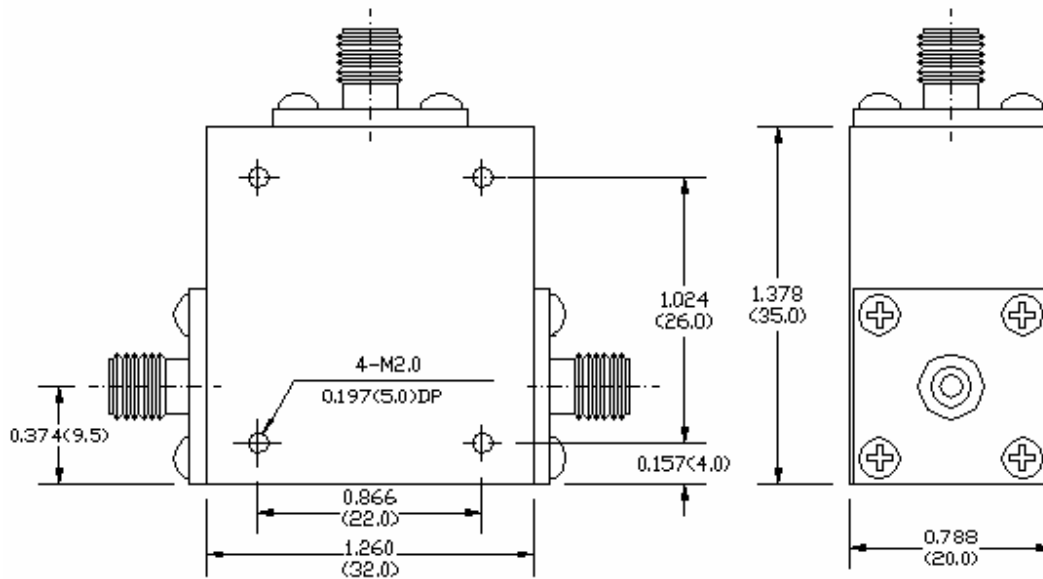

Note: All units are in inches.

Ordering Information:

