

Key Features:


- Wide frequency range: 2000-4000MHz partial or full band
- 50 ohm SMA coaxial connectors
- Small size, low cost
- Power handling +10 Watts forward,
- Operating temperature -10~+65°C



Electrical Specifications

Part No.	Freq Range GHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F2612-0300-67	2.00-4.00	0.6 Max	≥ 16	≤ 1.4	≥ 10	-10 ~ +65

Mechanical Structure:

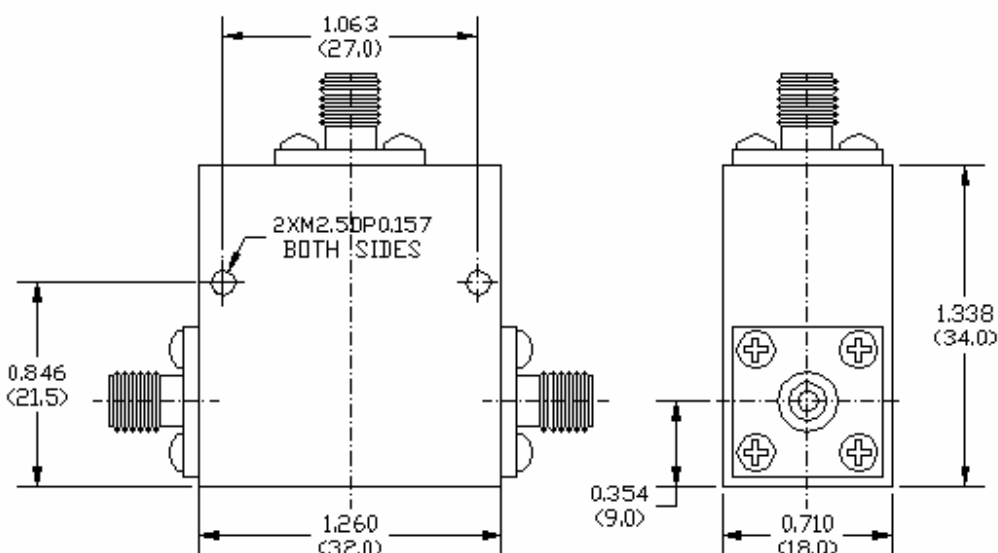

Note: All units in inches (mm).

Ordering Information:

