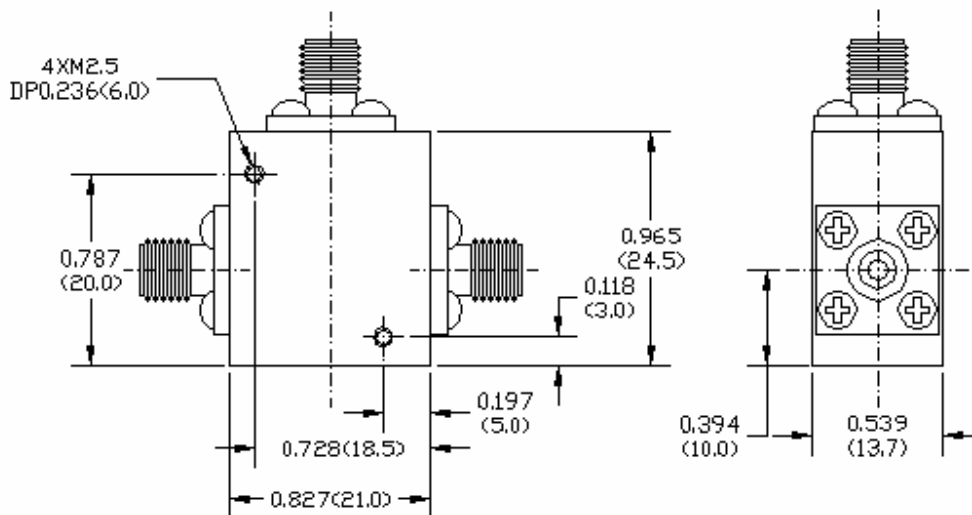


Key Features:

- Center frequency operation in 3.4-4.8GHz full band operation
- SMA connectorized configuration
- Small size, low cost
- Power handling +10 Watts forward, +2Watt Reverse

Electrical Specifications

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F2628-0410-34	3.4-4.8	0.5 Max	19	≤ 1.3	10	-30 ~ +60

Mechanical Structure:**Ordering Information:**

F2628-XXXX-XX
 ↓ ↓
 Bandwidth, XX%
 ↓
 Frequency XX.XX GHz