


Key Features:

- Frequency range: 3.0~6.0GHz, bandwidth up to full band
- SMA connectors
- Small size, low cost
- Power handling +5 Watts
- Default circulation direction is clockwise, customer can specify if otherwise
- Customer specify center frequency and bandwidth

Electrical Specifications

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F2640-0450-67	3.0~6.0	0.5 Max	≥ 18	≤ 1.35	≥ 5	-20 ~ +65

Mechanical Structure:

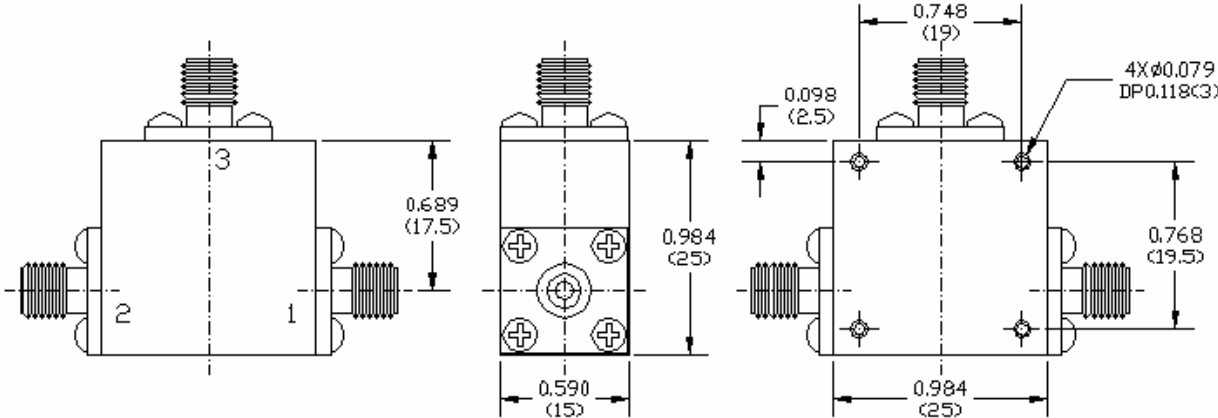

Note: All units are in inches (mm).

Ordering Information:

