


**Key Features:**

- Frequency range: 4.5~6.5GHz
- SMA connectors
- Small size, low cost
- Power handling +10 Watts
- Customer specify center frequency and bandwidth

**Electrical Specifications**

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F2648-0565-09	5.40-5.90	0.5 Max	≥ 20	≤ 1.2	≥ 10	-25 ~ +55
F2648-0615-08	5.90-6.40	0.5 Max	≥ 20	≤ 1.2	≥ 10	-25 ~ +55
F2648-0650-16	5.90-6.40	0.5 Max	≥ 20	≤ 1.2	≥ 10	-25 ~ +55

**Mechanical Structure:**

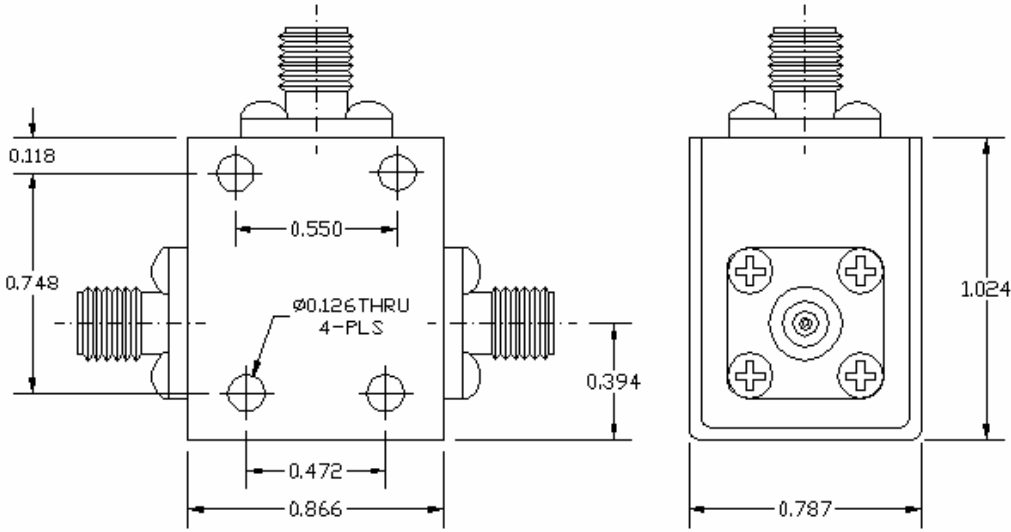

Note: All units are in inches.

**Ordering Information:**

