


**Key Features:**

- Frequency range: 6.0~12.0GHz full band operation
- SMA connectors
- Small size, low cost
- Power handling +10 Watts CW, 100 Watt peak pulse power
- Default circulation direction is clockwise, customer can specify if otherwise

**Electrical Specifications**

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts CW/Peak	Temp. Range, °C
F2666-0900-67	6.0~12.0	0.6 Max	≥ 16	≤ 1.40	≥ 10/100	-20 ~ +70

**Mechanical Structure:**

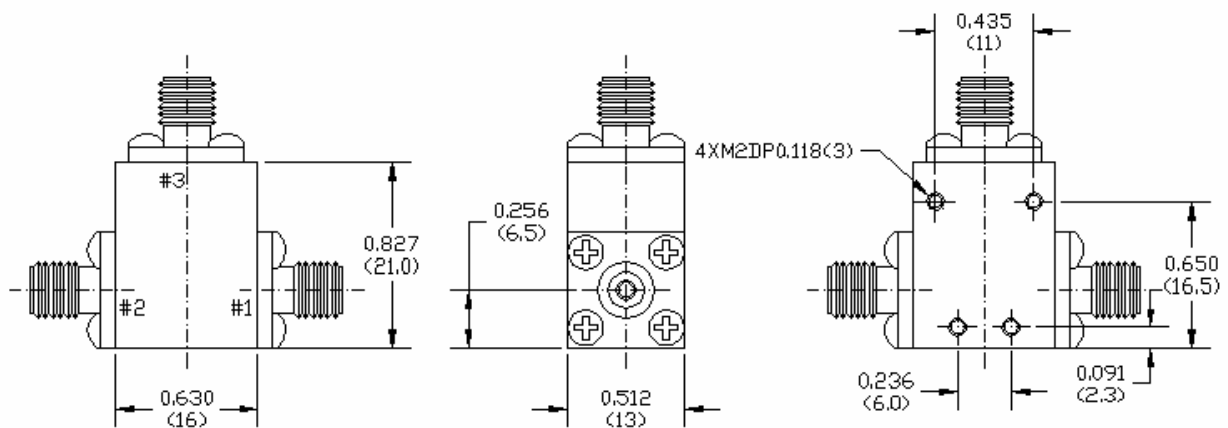

Note: All units are in inches (mm).

**Ordering Information:**

