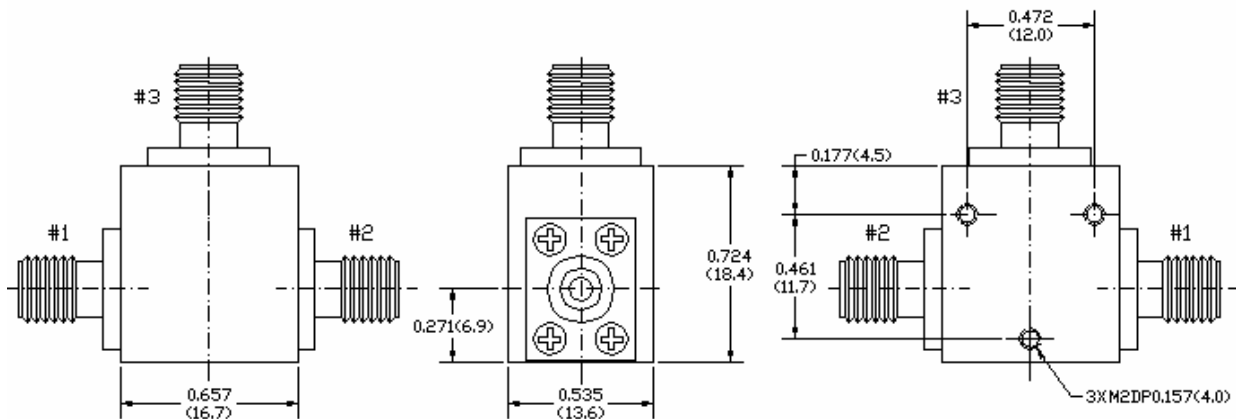


**Key Features:**

- Center frequency range from 5.0 to 10.0GHz range, bandwidth up to 1GHz
- SMA connectorized configuration
- Small size, low cost
- Power handling +10 Watts forward
- Operating temperature -40~+70°C

**Electrical Specifications**

Part Number	Freq Range GHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F2680-0650-16	6.0-7.0	0.4 Max	20.0	≤ 1.25	≥ 10	-40 ~ +70

**Mechanical Structure:**

Note: All units in inches (mm)

**Ordering Information:**

F2680-XXXX-XX  
          ↓          ↓  
          Bandwidth, XX%,  
          ↓  
          Frequency XX.XX GHz