


Key Features:

- Wide frequency range: 6.0-18.0GHz full band
- SMA connectorized configuration
- Small size, low cost
- Power handling +10 Watts maximum forward
- Operating temperature -40~+70°C

Electrical Specifications

Part Number	Freq Range GHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F2700-1200-A0	6.0-18.0	1.5 Max	≥ 10	≤ 1.9	≥ 10	-40 ~ +70

Mechanical Structure:

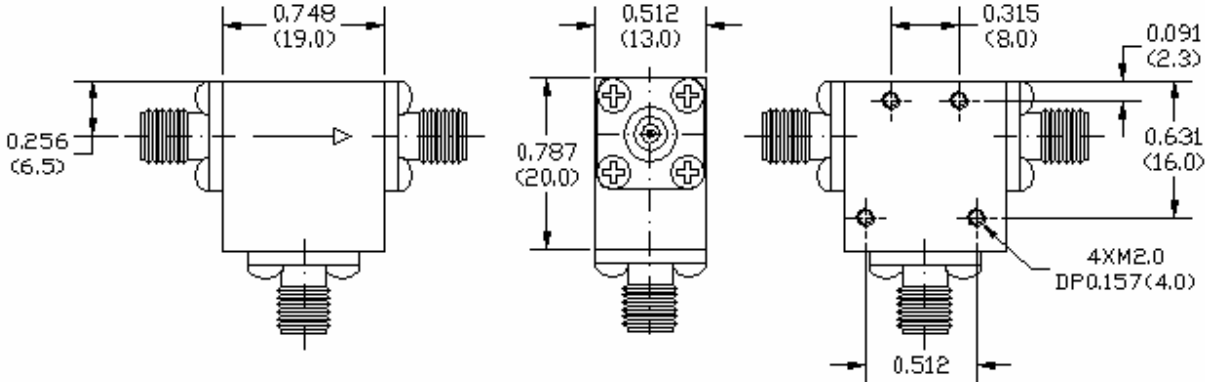

Note: All units in inches

Ordering Information:

