


Key Features:

- Center frequency operation in 10.9-12.8GHz full band
- SMA connectorized configuration
- Small size, low cost
- Power handling +10 Watts forward, +2Watt Reverse
- Operating temperature -40~+70°C

Electrical Specifications

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F2725-1185-16	10.9-12.8	0.5 Max	≥ 20	≤ 1.25	10	-40 ~ +70

Mechanical Structure:

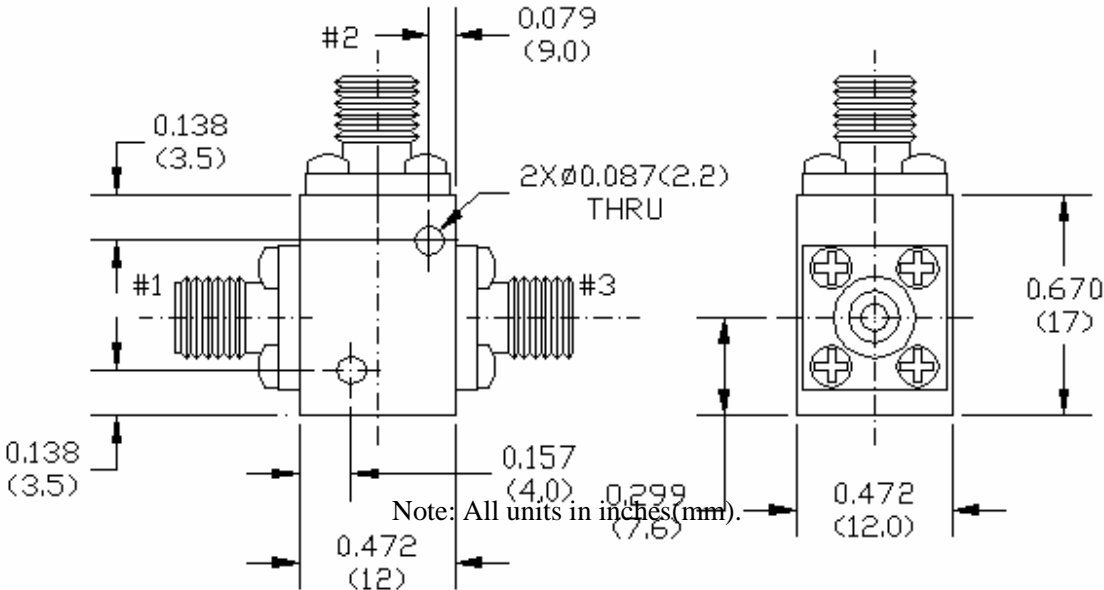

Ordering Information:

