


**Key Features:**

- Wide frequency operation, up to octave bandwidth
- SMA or N-type connectors,
- Small size, low cost
- Power handling +20 Watts forward, +10 Watt reverse resistor.

**Electrical Specifications**

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F2823-0125-40*	100~150	0.7	≥ 20	≤ 1.30	1	+15 ~ +50
F2823-0150-67	100~200	1.0 Max	≥ 15	≤ 1.50	20	-20 ~ +55
F2823-0375-67	250~500	1.0 Max	≥ 15	≤ 1.50	20	-20 ~ +55

**Mechanical Structure:**

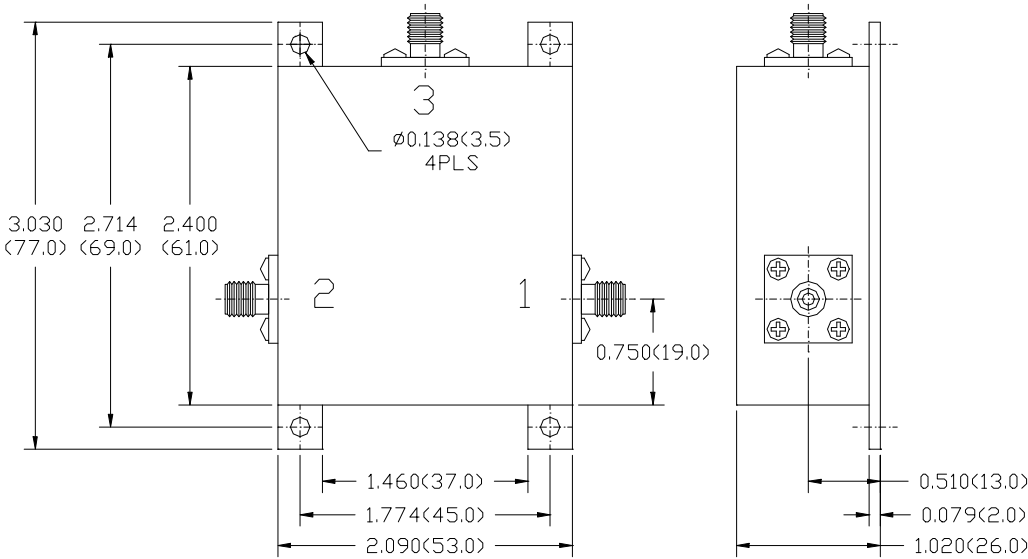

Note: All units are in inches (mm).

**Ordering Information:**

