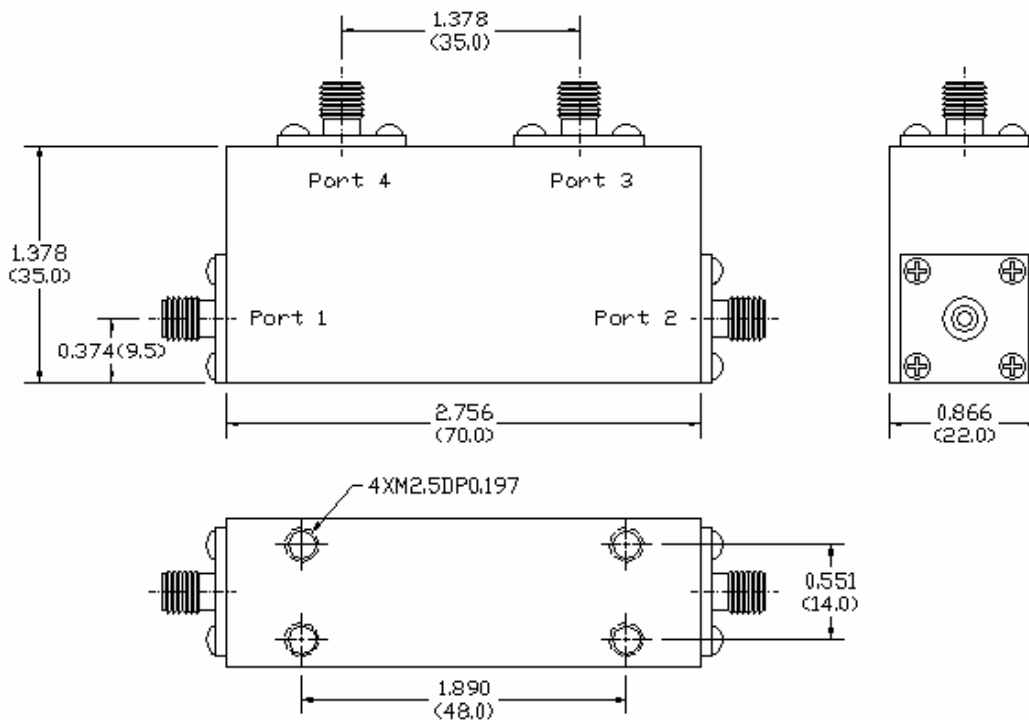


**Key Features:**

- Center frequency range: 900~1800MHz
- Dual junction for high isolation
- SMA female connectors
- Power handling >+50Watts CW, 500 Watt Pulse
- Operating temperature -30~+60°C

**Electrical Specifications**

Part No.	Freq Range GHz	Insertion Loss, dB 1-2, 3-4	Insertion Loss, dB 2-3, 4-1	Reverse Isolation, dB, 2-1, 4-3	Reverse Isolation, dB, 3-2, 1-4	VSWR	Power, Watts, CW/Pulse	Temp. Range, °C
F2917-0109-24	0.96~1.22	1.0 Max	0.5 Max	≥40	≥20	≤1.25	≥50/500	-30 ~ +60
F2917-0130-15	1.2~1.4	1.0 Max	0.5 Max	≥40	≥20	≤1.25	≥50/500	-30 ~ +60

**Mechanical Structure:****Ordering Information:**

Note: All units in inches(mm)

F2917-XXXX-XX

Bandwidth, XX%,

Frequency XX.XX GHz,