

Key Features:


- Center frequency range: 1700~3000MHz
- Dual junction for high isolation
- SMA female coaxial connectors
- Power handling >+10Watts
- Operating temperature -30~+60°C



Electrical Specifications

Part No.	Freq Range MHz	Insertion Loss, dB 1-2, 3-4	Insertion Loss, dB 2-3, 4-1	Reverse Isolation, dB, 2-1, 4-3	Reverse Isolation, dB, 3-2, 1-4	VSWR	Forward Power, Watts	Temp. Range, °C
F2932-1940-24	1710-2170	0.5	1.0	≥20	≥40	≤1.2	≥30	-40 ~ +70
F2932-2500-16	2300-2700	0.5	0.8	≥20	≥40	≤1.2	≥30	-40 ~ +70

Mechanical Structure:

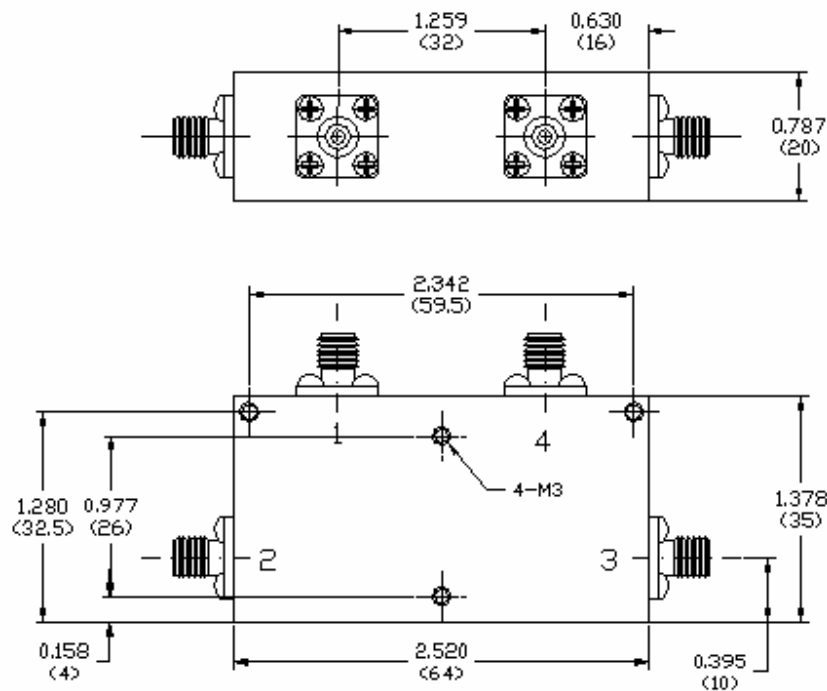

Note: All units in inches(mm)

Ordering Information:

