


**Key Features:**

- Center frequency range: 2.8~4.0GHz
- Dual junction for high isolation
- SMA female connectors
- Power handling up to +200Watts CW, 2000 Watt Pulse
- Operating temperature -30~+60°C

**Electrical Specifications**

Part No.	Freq Range GHz	Insertion Loss, dB 2-3, 4-1	Insertion Loss, dB 1-2, 3-4	Reverse Isolation, dB, 3-2, 1-4	Reverse Isolation, dB, 2-1, 4-3	VSWR	Power, Watts, CW/Pulse	Temp. Range, °C
F2936-0310-13	2.9~3.3	0.8 Max	0.4 Max	≥40	≥20	≤1.20	200/2000	-30 ~ +60
F2936-0335-15	3.1~3.6	1.0 Max	0.5 Max	≥40	≥20	≤1.20	200/2000	-30 ~ +60
F2936-0355-08	3.4~3.7	0.8 Max	0.4 Max	≥40	≥20	≤1.20	200/2000	-30 ~ +60

**Mechanical Structure:**

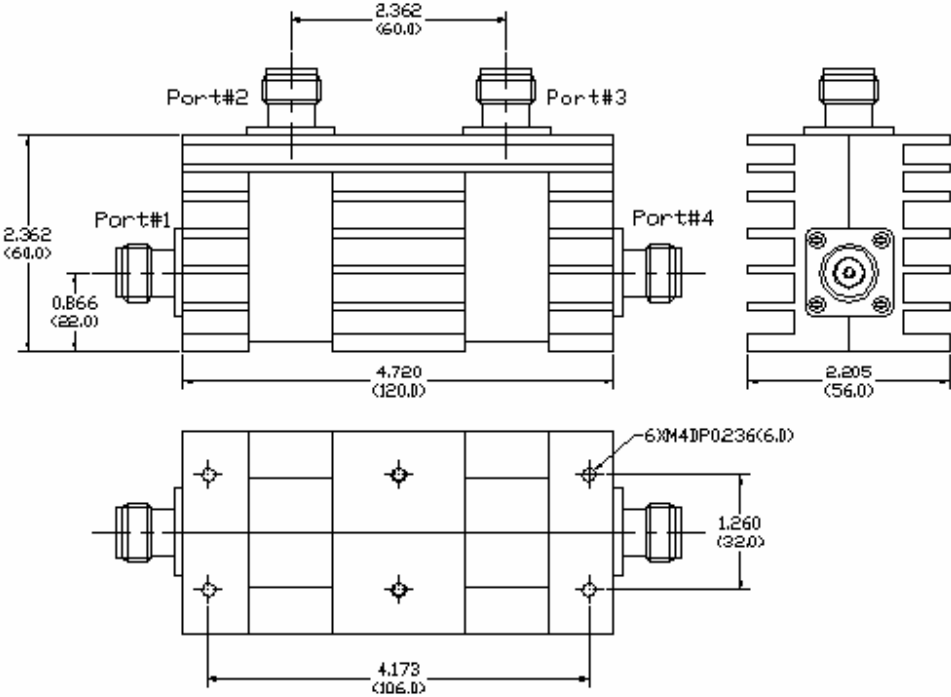

**Ordering Information:**

F2936-XXXX-XX Note: All units in inches(mm)  
 Frequency XX.XX GHz, Bandwidth, XX%,