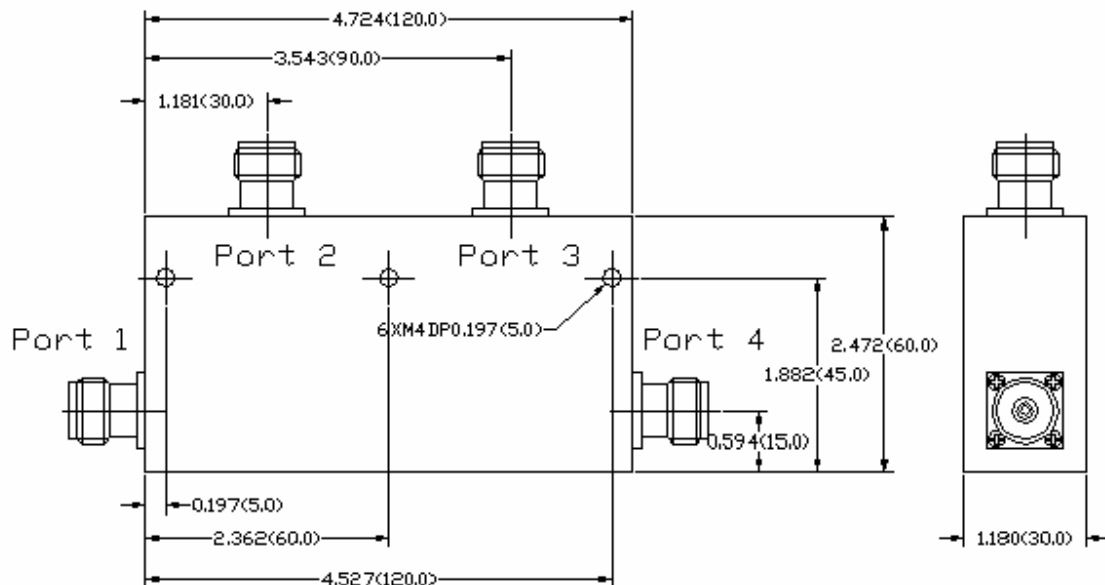


Key Features:

- Center frequency range: 400~970MHz
- Dual junction for high isolation
- SMA or N-type female connectors
- Power handling >+50Watts CW
- Operating temperature -40~+70°C
- Customer can specify center frequency and bandwidth

Electrical Specifications

Part No.	Freq Range MHz	Insertion Loss, dB 1-2, 3-4	Insertion Loss, dB 2-3, 4-1	Reverse Isolation, dB, 2-1, 4-3	Reverse Isolation, dB, 3-2, 1-4	VSWR	Power, Watts, CW	Temp. Range, °C
F2948-0075-40	600~900	0.5 Max	1.0 Max	≥17	≥34	≤1.35	50	-40 ~ +70

Mechanical Structure:

Note: All units in inches(mm)

Ordering Information:

F2948-XXXX-XX
 ↓ ↓
 Bandwidth, XX%,
Frequency XX.XX GHz,