

Key Features:


- Frequency range: 14.0~18.0GHz, bandwidth up to 1200MHz
- WR-62 waveguide, compact size
- Power handling >10Watts CW
- Customer specify center frequency and bandwidth



Electrical Specifications

Part No.	Freq Range GHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	CW Power, Watts	Temp. Range, °C
F3200-1488-08	14.3~15.45	0.40 Max	≥ 20	≤1.25	≥ 10	-40 ~ +80
F3200-1512-04	14.8~15.45	0.38 Max	≥ 21	≤1.2	≥ 10	-40 ~ +80
F3200-1512-04	14.8~15.45	0.38 Max	≥ 21	≤1.2	≥ 10	-40 ~ +80

Mechanical Structure:

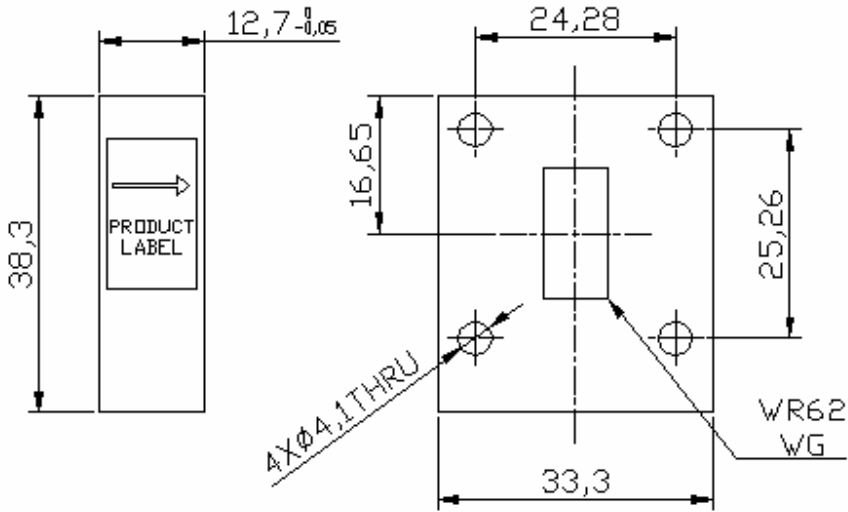

All units in mm

Ordering Information:

