

**Key Features:**


- Center frequency range: 12.4~18.0GHz, frequency bandwidth up to 500MHz
- WR-62 waveguide
- Power handling >150Watts CW, 1kW pulse
- Customer can specify center frequency and bandwidth



**Electrical Specifications**

Part No.	Freq Range GHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	CW Power, Watts	Pulse Power, kWatts	Temp. Range, °C
F3720-1378-03	13.60~13.95	0.4 Max	≥ 20	≤1.2	≥ 150	≥ 1	-54 ~ +85
F3720-1351-02	13.40~13.63	0.4 Max	≥ 20	≤1.2	≥ 150	≥ 1	-54 ~ +85

**Mechanical Structure:**

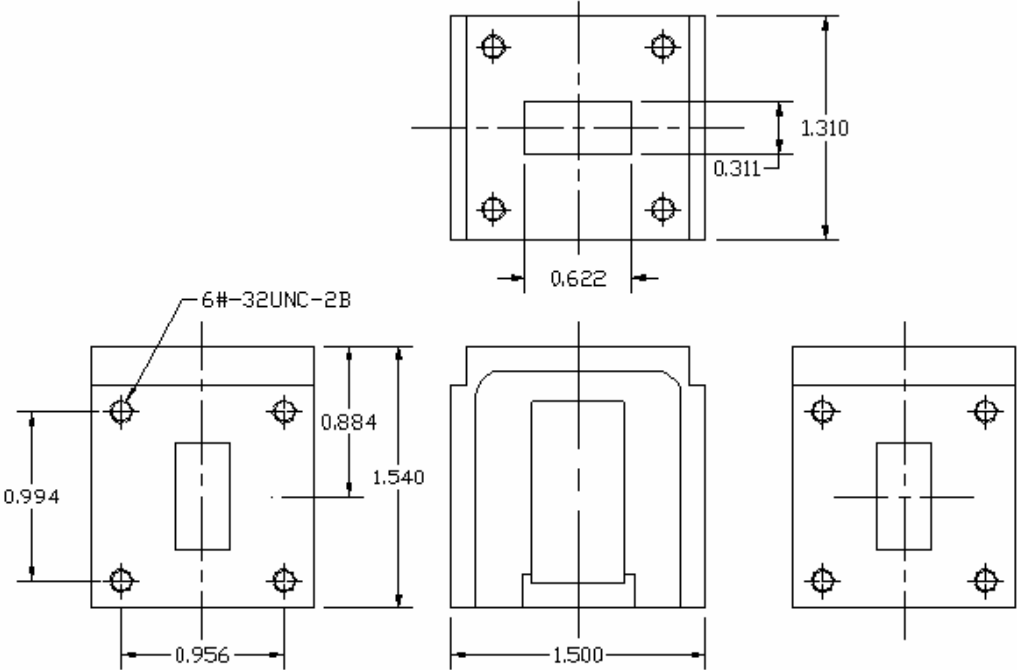

All units in inches

**Ordering Information:**

