


Key Features:

- Center frequency range: 17.7~26.5GHz, frequency bandwidth up to 20GHz
- WR-42 waveguide
- Power handling >10Watts CW
- Customer can specify center frequency and bandwidth

Electrical Specifications

Part No.	Freq Range GHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	CW Power, Watts	Temp. Range, °C
F3796-1870-11	17.70~19.70	0.5 Max	≥ 20	≤1.25	≥ 10	-20 ~ +70
F3796-2100-10	20.00~22.00	0.5 Max	≥ 20	≤1.25	≥ 10	-20 ~ +70
F3796-2240-11	21.20~23.60	0.5 Max	≥ 20	≤1.25	≥ 10	-20 ~ +70
F3796-2550-08	24.50~26.50	0.5 Max	≥ 20	≤1.25	≥ 10	-20 ~ +70

Mechanical Structure:

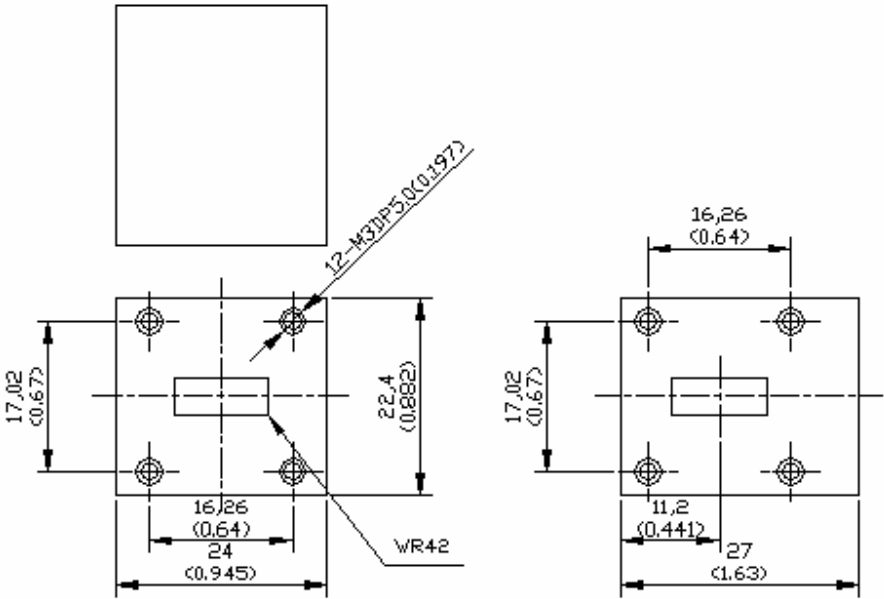

All units in millimeters (inches)

Ordering Information:

